Protective Apparel
Isolation Gowns

	CODE	DESCRIPTION	SIZE	CASE QTY	CASE DIMENSIONS
N	60-3112	Spunbond Film Laminate Isolation Gown	S	100	22x15x17" (56x38x43cm)
N	60-3113	Spunbond Film Laminate Isolation Gown	M	100	22x15x17" (56x38x43cm)
N	60-3107	Spunbond Film Laminate Isolation Gown	L	100	21x14x14" (53x36x36cm)
N	60-3108	Spunbond Film Laminate Isolation Gown	XL	100	21x14x14" (53x36x36cm)
N	60-3109	Spunbond Film Laminate Isolation Gown, Knit Cuff	L	100	22x14x19" (55x36x47.5cm)
N	60-3110	Spunbond Film Laminate Isolation Gown, Knit Cuff	XL	100	22x14x19" (55x36x47.5cm)
N	60-3111	Spunbond Film Laminate Isolation Gown	2XL	100	24x14x21" (60x36x54cm)

Materials

- Two-Layered Polypropylene (PP)/Polyethylene (PE) Film

Product Attributes

- Full coverage protection
- Hook and loop neck closure
- Non stitched, thermal bonded sleeve seams
- Tie waist
- Elastic cuff, knit cuff

Sterilization

Non-Sterile: If a product is delivered non-sterile and is ultimately for use in sterile environments, it is intended to be sterilized by the re-packager. This includes further packaging and sterilization according to the validated processes of the re-packager. These products are to be sterilized by ethylene oxide (EO). Other methods of sterilization have not been validated by Alleset.

Shelf Life

Non-Sterile: Established at 5 years based upon sterile packaged product aging studies and normal warehouse storage conditions. After 5 years, the product should be performance tested to ensure compliance to specifications.

Product Certifications/Standards


- Class 1 per 16 CFR part 1610 (flammability testing)
- CE certified as class I, according to MDR 2017/745, Annex VIII, Rule 1
- Meets ANSI/AAMI PB70:2012 Level 2 Liquid Barrier Protection

Manufacturing Certifications/ Registrations

- EN ISO 13485:2016

Storage

- General warehouse conditions

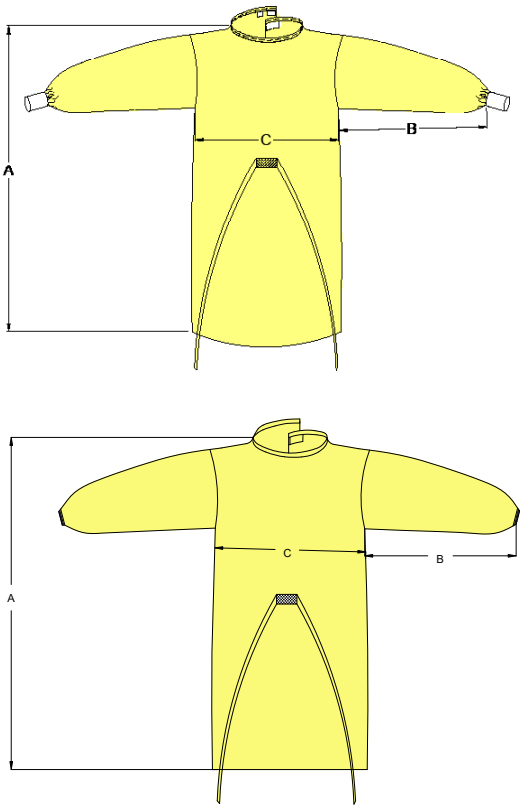

Code	A: Total Length	B: Sleeve Length	C: Chest Width
60-3112	42" (106.6cm)	20.5" (52cm)	24.5" (62.2cm)
60-3113	44" (111.7cm)	21.5" (54.6cm)	26.5" (67.3cm)
60-3107	46" (117cm)	23" (58cm)	29" (74cm)
60-3108	48" (122cm)	24" (61cm)	31" (79cm)
60-3109	46" (116.8cm)	22.5" (57.1cm)	28.5" (72.3cm)
60-3110	48" (121.9cm)	23.5" (59.6cm)	30.5" (77.4cm)
60-3111	50" (127cm)	24.5" (62.2cm)	32.5" (82.5cm)
Tolerance	±1" (2.54cm)	±0.8" (2cm)	±1" (2.54cm)

LATEX · PHT DEHP · CN/VN · N NON-STERILE

Alleset
4142 Industry Way
Flowery Branch, GA 30542,
USA
www.alleset.com

SM-TDS-002 2022

Country of Origin Abbreviations per ISO 3166-1, Alpha-2 Codes.

GRI Medical & Electronic Technology Co., LTD
1805 Honggao Road,
314031 Jiaxing, Zhejiang
PEOPLE'S REPUBLIC OF CHINA
www.alleset.com

US FDA Establishment Registration #3004911384

EC REP
Emergo Europe B.V.
Westervoortsedijk 60,
6827 AT Arnhem,
The Netherlands
www.emergobyul.com