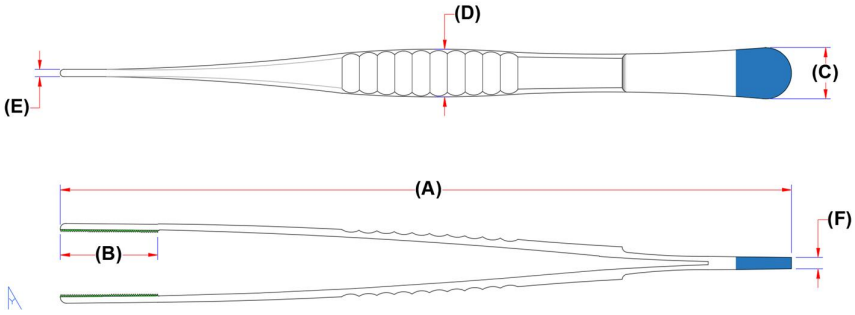



## Products Information

| Code | | Dimensions Detail | | | | | | |
|---|---|---|---|---|---|---|---|---|
| SKG Codes | Aesculap Ref | A ± 5.00mm | B ± 1.00mm | C ± 0.50mm | D ± 0.50mm | E ± 0.25mm | F ± 0.25mm | Weight |
| SKG-40-527 | | 15cm/150mm (6") | 20.00 mm | 11.00 mm | 10.25 mm | 1.60 mm | 2.50 mm | 25g ± 5g |

| | |
|---|---|
| **Product Description:** | DeBakey Dissecting Forceps Fine Straight & Toothed jaws |
| **Product Finish:** | Satin Finish (As Per Customer Requirement) |

| | |
|---|---|
| **Intended use:** | DeBakey Dissecting Forceps are specially manufactured as surgical instruments typically used to grabbing blood vessels and other small tissues during surgical procedures. |

## Material Detail

| | |
|---|---|
| **Product Material:** | Stainless steel A.I.S.I 410 |

### Material Specification

| Type | Carbon | Manganese | Phosphorus | Sulpher | Chromium | Nickel | Silicon |
|---|---|---|---|---|---|---|---|
| A.I.S.I 410 | 0.15% max | 1.00% max | 0.040% max | 0.030% max | 11.50 to 13.50 | 0.12 | 1.00% max |
| **Furnace Temperature:** | | 900c° - 1100c° | | **Hardness Standard:** | | HRC 42 To 45 | |

## Packing Information's

| | |
|---|---|
| **Laser Marking:** | CE (As Per Customer Requirement) |
| **Packing:** | Single Forceps packed in the single sterile pouch and Dispensing box and outer box |
| **Labeling:** | Each Single Pouch is Labeled and Each Dispensing box is Labeled. (As Per Customer Requirement) |

| | |
|---|---|
| **Classification:** | Class II a Rule 6 |

| | | | |
|---|---|---|---|
| **Biological Static:** | Sterile ☑ | Non Sterile ☐ | |
| **Sterilization Method:** | ETO Sterilization | **Shelf Life:** | 5 Years |

| Working Environment | | Storage Condition | |
|---|---|---|---|
| **Working Temperature:** | 10°C To 40 °C | **Storage Temperature :** | 0°C To 50 °C |
| **Relative Humidity Range:** | ≤ RH80% | Stored in a clean, dry and Moisture Free Area | |
| **Atmospheric Pressure Range:** | 760hPa - 1060hPa | | |